


CHOOSE ONE MOUNTING METHOD BELOW BASED ON YOUR SETUP:


1 Floor Mounting (Standard)

SCREW THE BOTTOM PLATE TO THE FLOOR USING
APPROPRIATE SCREWS FOR
YOUR FLOOR TYPE (NOT PROVIDED)

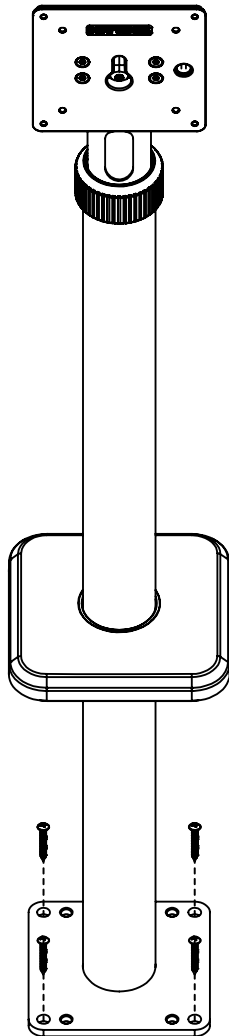


1A Free Standing (Optional Large Base)

Use this option for added stability when freestanding.

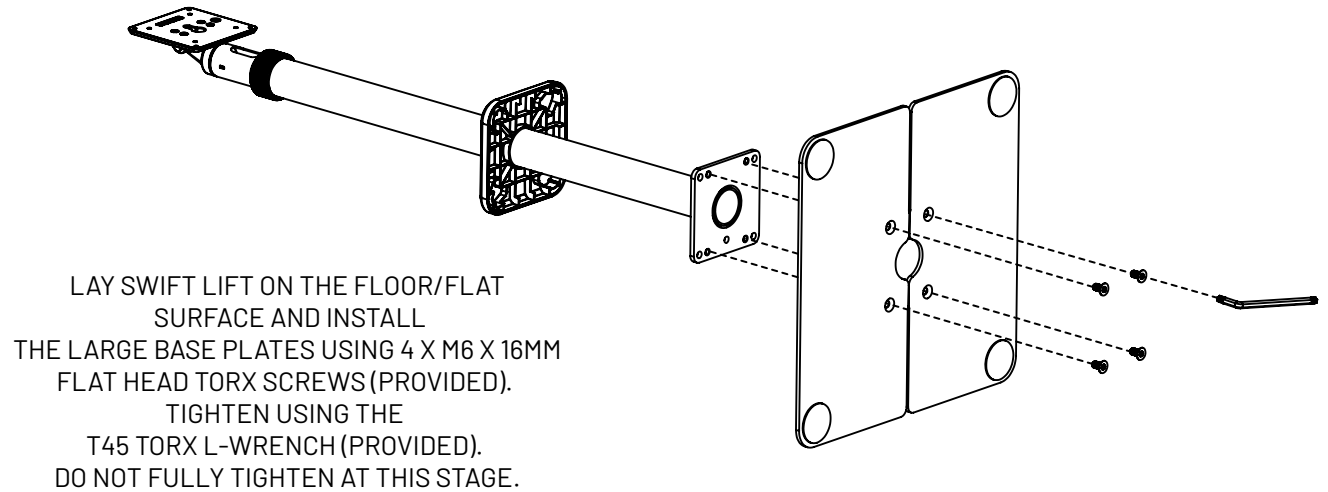


1A - Continued

INSERT THE ALIGNMENT SPACERS BETWEEN THE LARGE BASE PLATES AS SHOWN,
THEN FULLY TIGHTEN ALL SCREWS SECURELY USING THE PROVIDED T45 TORX L-WRENCH.

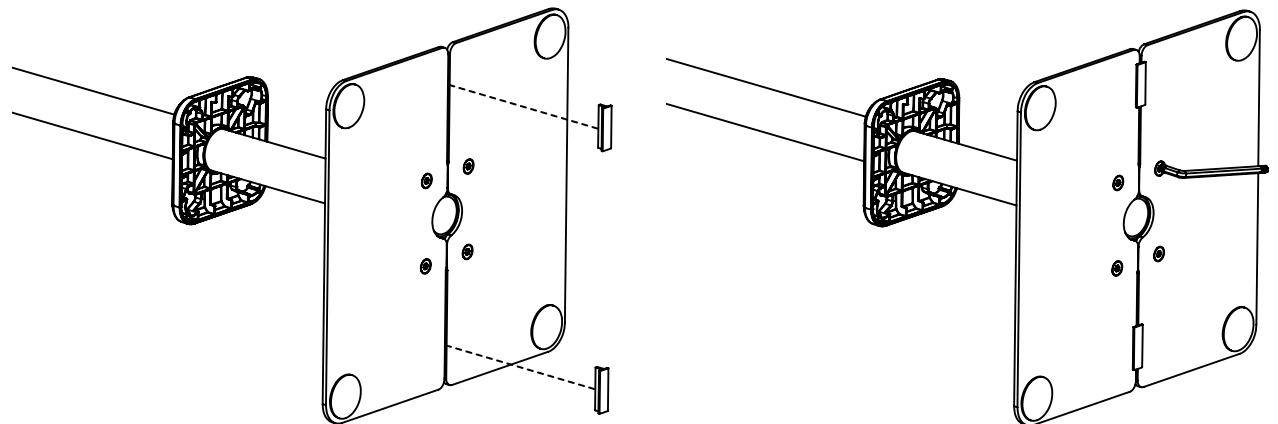


2

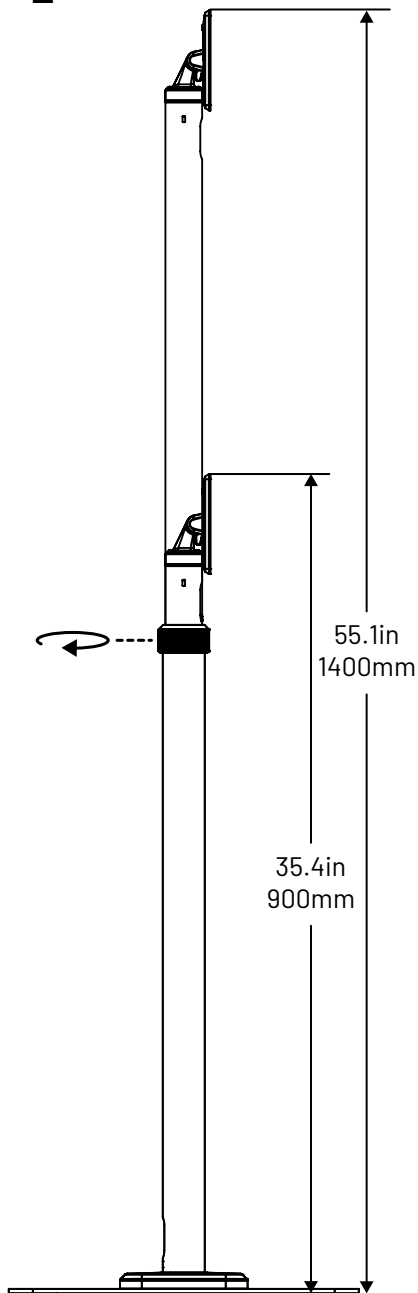

LOOSEN KNOB TO ADJUST
POLE TO DESIRED HEIGHT.


- MIN HEIGHT: 35.4IN / 900MM
- MAX HEIGHT: 55.1IN / 1400MM
- DO NOT RAISE THE POLE PAST THE "MAX" MARK.

TIGHTEN SECURELY ONCE HEIGHT IS SET.

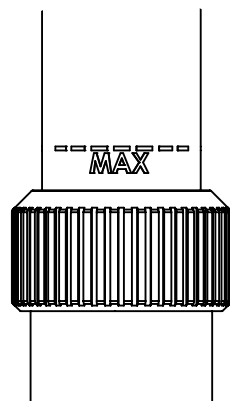


3

ROUTE CHARGING CABLE
THROUGH THE STAND AS SHOWN

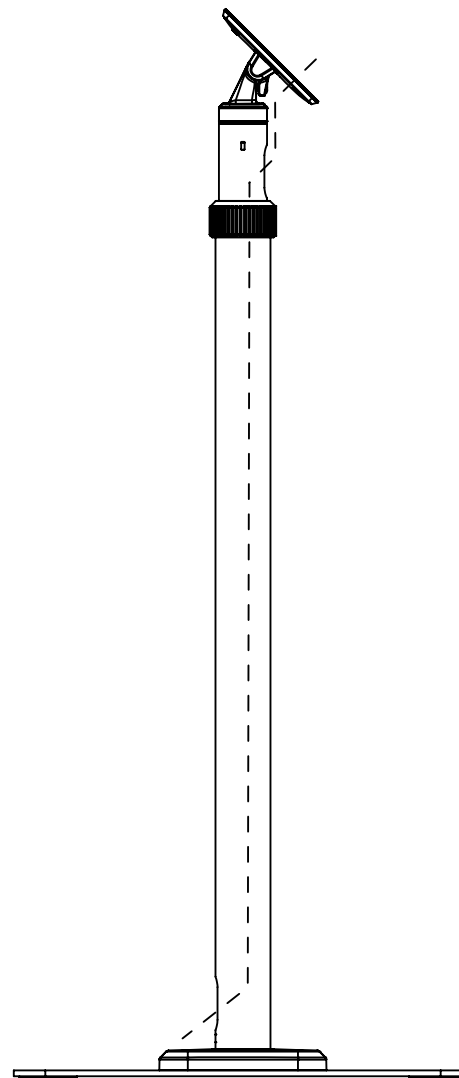

4

INSTALL ENCLOSURE/VESA MOUNT TO
STAND USING M4 X 8MM
PHILLIPS PAN HEAD SCREWS (PROVIDED).

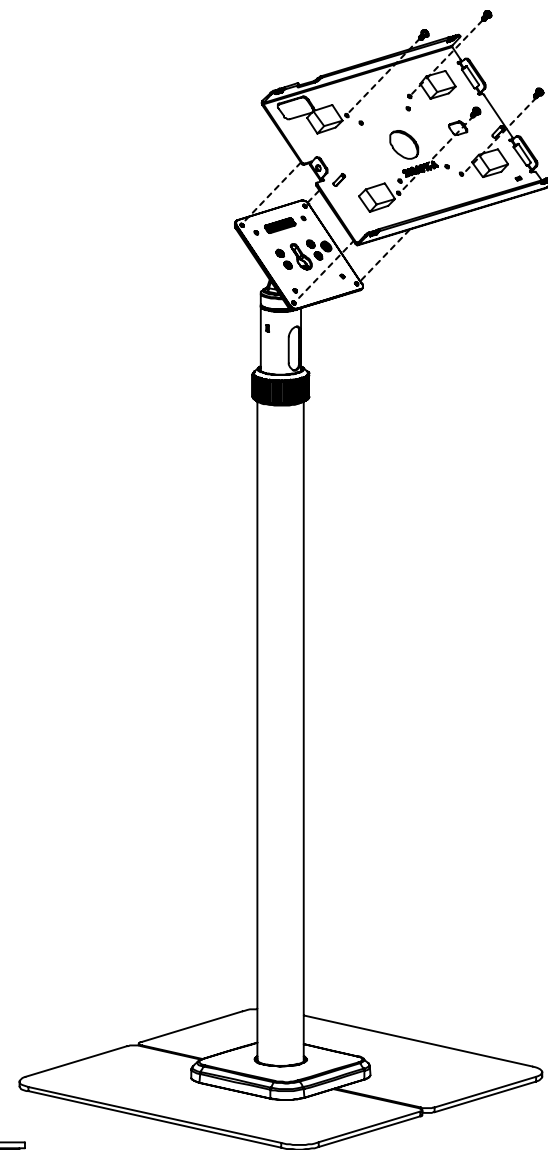


5

Adjustments


In The Box

INSTALL THE ENCLOSURE TOP PLATE/VESA MOUNT PER ITS INSTRUCTIONS.

ADJUST HINGE TENSION USING THE T30 TORX L-WRENCH (PROVIDED)



M4 X 8mm
Phillips Pan Head Screws



T30 TORX L-Wrench




Alignment Spacers




M6 X 16mm
Flat Head TORX Screws



T45 TORX L-Wrench

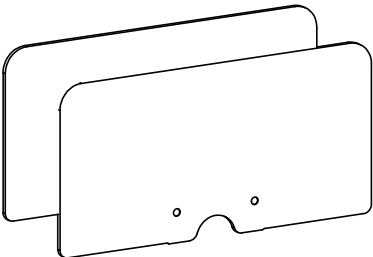

Large Base Plates

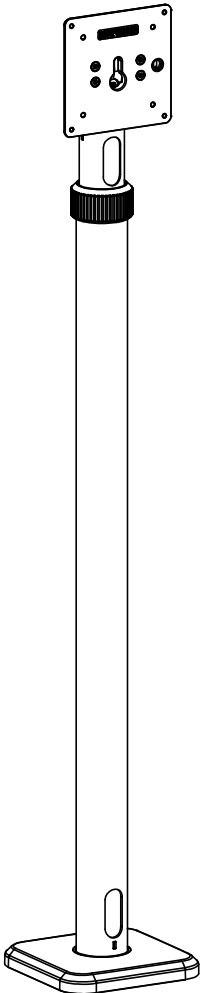

Swift Lift Pole

